

QSF3.8




85-132 hp
63-99 kW

Cummins
Direct Flow™
Air Cleaner



3.8-Liter
4-Cylinder

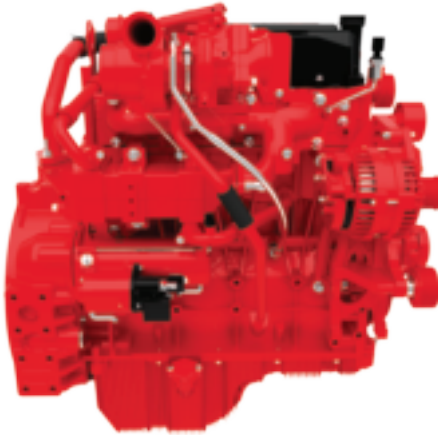

Selective Catalytic Reduction (SCR)



- Highest power output in the sub-4-liter class
- Simple, compact installation for Tier 4 Final
- Exhaust Gas Recirculation (EGR) + SCR-only solution
- Global service and support, with a dealer network of over 6,500 distributor and dealer locations in 190 countries
- 24/7/365 support by calling Cummins Care at 1-800-DIESELS™ (1-800-343-7357)

- Proven aftertreatment solution to meet EPA Tier 4 Final/EU Stage IV regulations
- Smaller space claim
- Service-free

Forward To Final.



Power Output	85-132 hp	(63-99 kW)
Peak Torque	360 lb-ft	(488 N•m)
Engine Weight (Wet)	767 lbs	(348 kg)
Aftertreatment Weight	75 lbs	(34 kg)
Fuel System	Electronic High Pressure Common Rail (HPCR) Fuel System	
Air Intake	Cummins Direct Flow Air Cleaner	
Turbo	Cummins Wastegate Turbo	
Emissions Control	EGR + SCR	
Electronics	Remote Electronic Control Module (ECM)	
Crankcase Filter	Open Crankcase Ventilation	
Fuel Performance	BSFC Optimized for Industrial Duty Cycles	



Cummins Inc.
Box 3005
Columbus, IN 47202-3005
U.S.A.

Phone: 1-800-DIESELS™ (1-800-343-7357)
Fax: 1-800-232-6393
Internet: cumminsengines.com

Twitter.com/CumminsEngines
YouTube.com/CumminsEngines

Bulletin 4087360 Printed in U.S.A. 6/14
©2014 Cummins Inc.